SAS**750**



A visually impactful, premium tubular ceiling system offering waveforms, full access and service integration.

SYSTEM GROUP SUSPENSION METHOD SAS carrier rail threaded rod suspension Linear profile ceiling MATERIAL PROFILE **Aluminum** / Steel Tubular **APPLICATION** Interior and exterior (aluminum) SYSTEM WEIGHT LIFE EXPECTANCY **ACCESS 25**yr 0.3 - 1_{lbs/lft} Full void access Depending on diameter and grid In excess of



SAS**750** Tubeline





SAS750 Tubeline fosters dynamic and impactful design along with practical considerations such as access and service integration. Tubeline offers specifiers numerous design features, such as curves and waveforms, as well as horizontal, vertical, interior and exterior mounting.

Available as either aluminum extrusions or rolled steel tubular sections.

Profile Sizes

Length	10'
Dimensions	1" 2"

SAS750 can accommodate a wide range of bespoke profile shapes, sizes and waveform profiles, all available on request. Longer continuous runs can be achieved through splices.

Void access can be achieved through demounting profiles or integrated access hatches.

Finishes

SAS750 Tubeline is available in all standard SAS finishes, please refer to page 110. Bespoke finishes are available on request, including polished and anodised (aluminum only).

Technical Support

Please contact our technical team for all questions relating to access, bespoke features and service integration.









Standard Perspective Drawing

- Threaded Rod (by others)
 Tubeline Carrier
 Tubular Profile

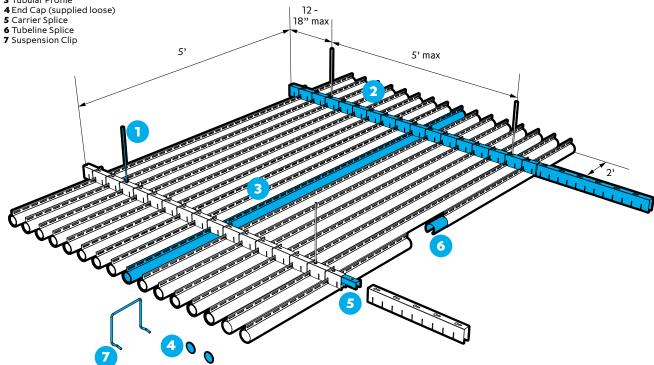

Standard Section Drawing

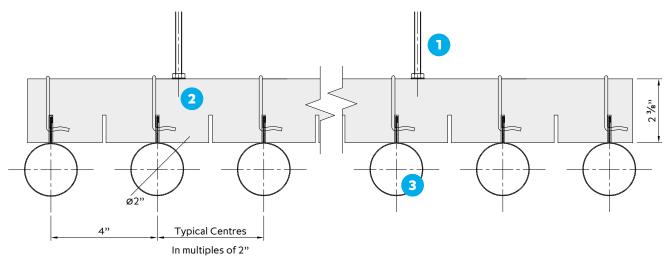





SAS**750**

John Lewis

Location
Birmingham, UK
Architect
John Lewis Design
Team, Brooker Flynn
Architects

Contractor Mace Ltd Purpose Retail