




WOODTONES

Let the outdoors in



ENABLING
SERENE
FOCUS

A low-angle photograph of a dense forest. The camera is positioned on the ground, looking up at the towering trees. The trunks of the trees are thick and textured, with some showing signs of age and decay. The canopy is thick with green leaves, and sunlight filters through, creating a warm, golden glow. The sky is visible through the branches, appearing bright and hazy. The overall mood is serene and majestic.

“Trees are
poems that the
earth writes upon
the sky.”

KHALID GEBRAN



SAS WoodTones

In a world of concrete and glass, there's something deeply familiar and comforting about the look of wood. It evokes a sense of warmth, character and authenticity. WoodTones is our new range of captivating wood look finishes for metal ceiling systems. Practical, durable, but most of all, beautiful.

WoodTones elevate the aesthetic of your space through the synergy of nature and innovation, connecting you to the organic. WoodTones finishes seamlessly combine the durability and circularity of metal with the warm, natural look of wood, delivering the best of both worlds.

WoodTones finishes provide a more sustainable alternative to using real timber. Fabricated with dye sublimation, WoodTones are low maintenance, highly durable and perfect for both interior and exterior architectural applications. They offer seamless service integration and low VOCs, while meeting the strictest fire safety requirements. Endlessly reproducible, the range offers colour uniformity in all its grain patterns and wood tones, replicated from our selection of trees.



WoodTones is a timber-look finish that is adaptable for full integration of SAS acoustic and lighting products

LET THE OUTDOORS IN

Practical & Durable

Durable and high tensile strength ensure incredible impact resistance, making WoodTones ideal for high traffic areas such as commercial buildings, retail and infrastructure applications.

Consistency in both dimension and thickness and guaranteed rigid stability, unlike wood which is prone to warping, twisting, cracking, and shrinking.



WoodTones is robust and scratch resistant, resulting in better protection against weathering, chemicals, and general wear.

Created with durable powder coatings which contain zero volatile organic compounds (VOCs).

High UV Resistance – AAMA 2604/05 rated, making them highly resistant to ultraviolet (UV) rays which results in a long lasting, highly aesthetic product.

Applied to perforated products, WoodTones offers the same world class acoustic performance as our standard finish products and have an even higher acoustic absorption than solid wood. Compared to real timber WoodTones gives a better acoustical performance.

High weatherability and corrosion resistance even in the most extreme environments.

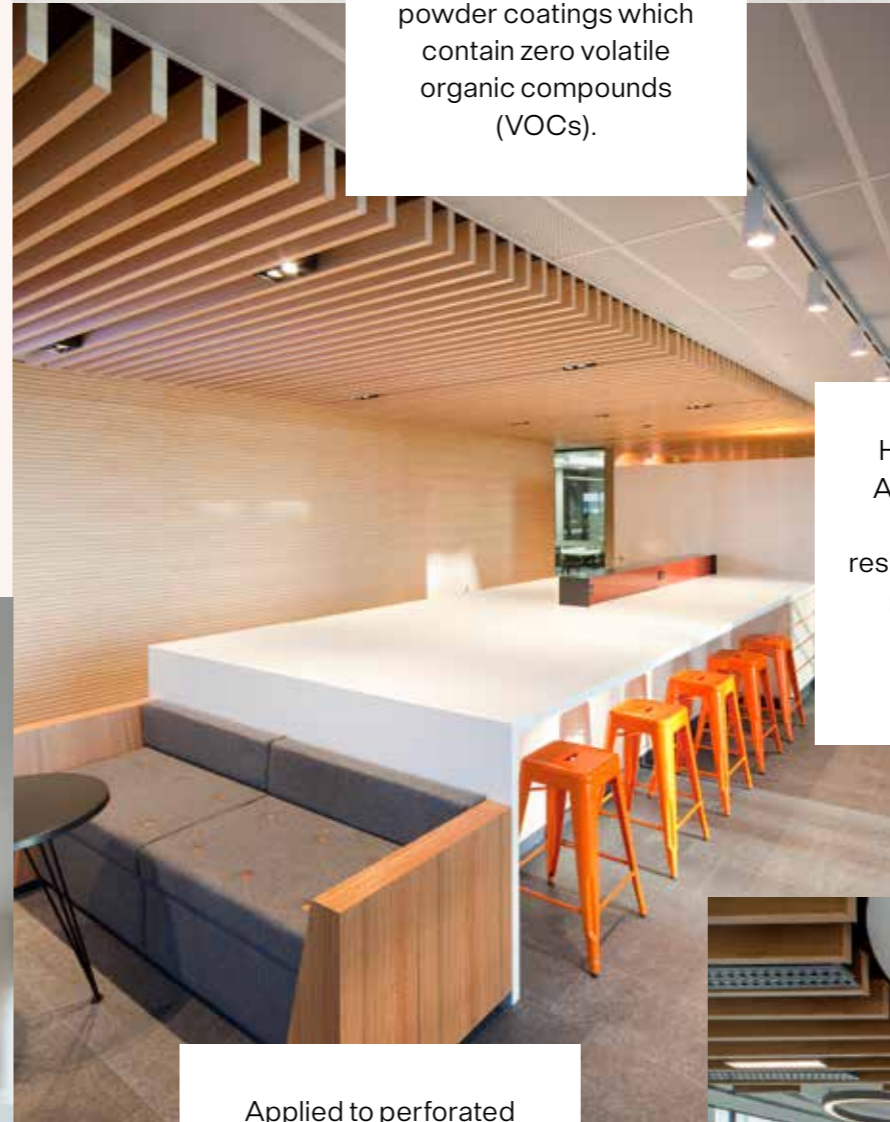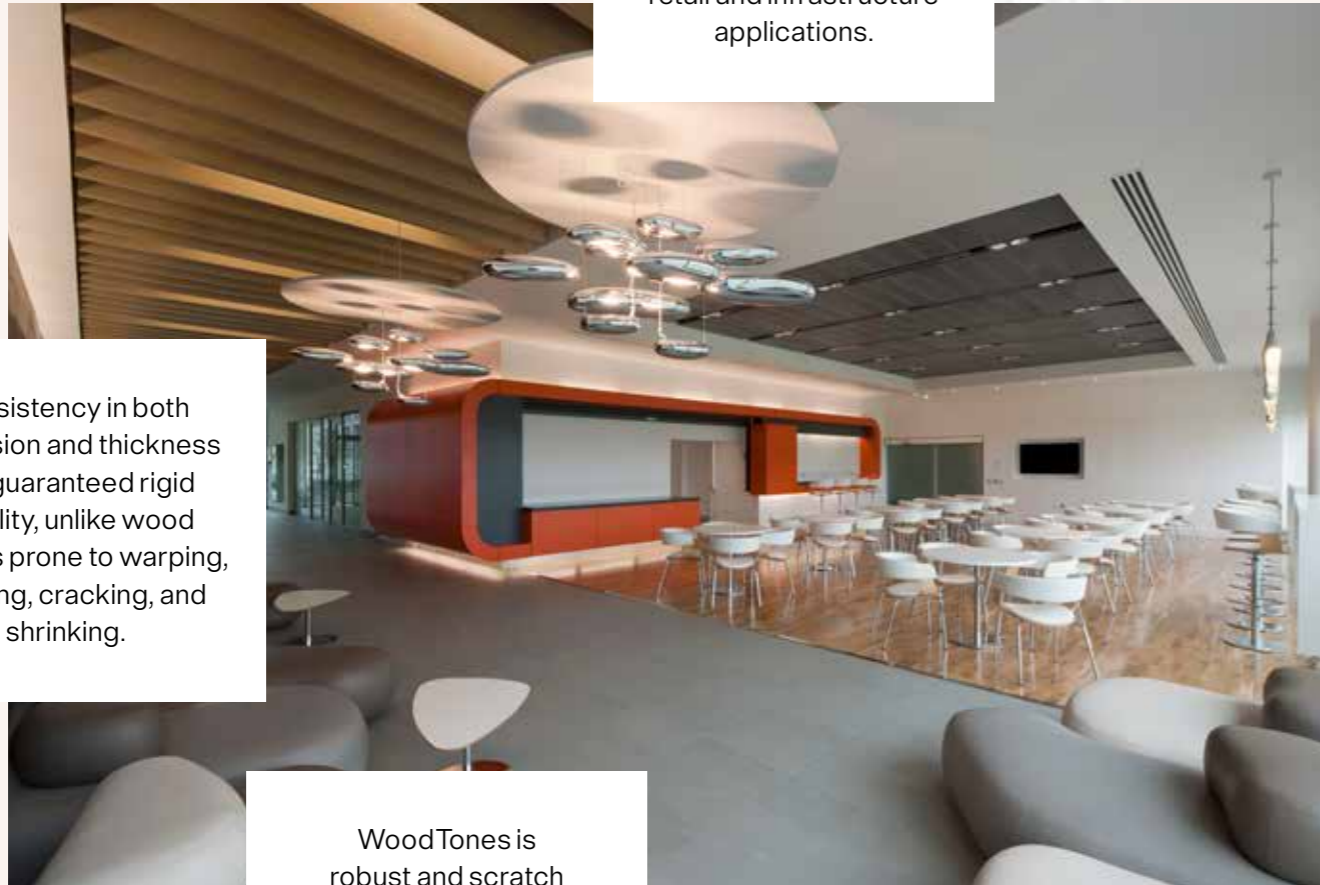

Finishes




BLANCO
OAK




TOSCANA
OAK




ROCKFORD
OAK

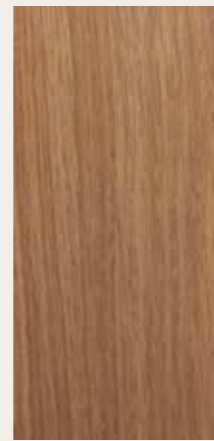

LIGHT
OAK

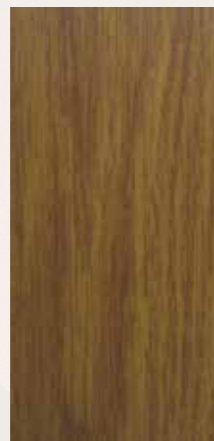

MID
OAK

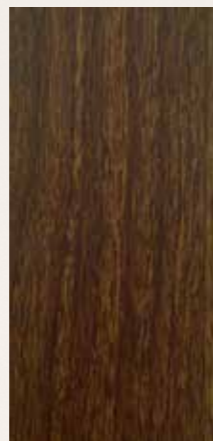

DARK
OAK



AMERICAN
OAK



SILVER
PINE



AGED
PINE




MAPLE




WHITE
SPRUCE



STEAMED
BEECH

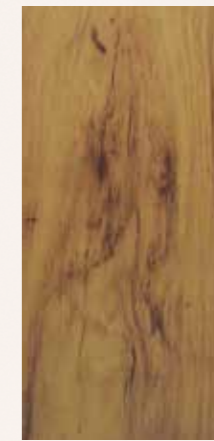

TECA

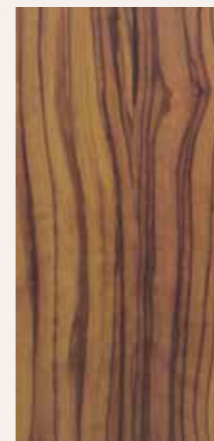

OLIVA



EUROPEAN
ALDER




CHERRY




WALNUT

This range and the technical information provided is based on WoodTones dye sublimation finishes and is suitable for most SAS ceiling systems and integrations. For certain applications however, an alternative coating process may be necessary according to product type, application and required volumes.

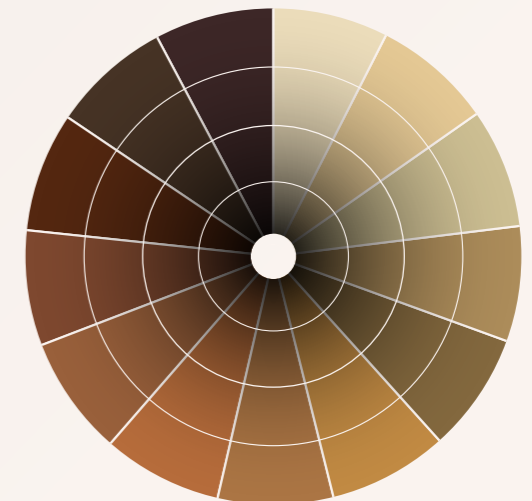




Technical Information



Durability

All sublimated finishes have been tested to South Florida Inspection Report & South Florida Instrumental Colour in accordance with ISO 2810:2004 and AAMA 2603 Coating Performance Report and AAMA 2604 Coating Performance Report.

WoodTones sublimated finishes are suitable for indoor or outdoor environments and are Qualideco specification Class 1.



Fire Performance

WoodTones sublimated finishes have been tested to BS EN 13501, ASTM E84, and UL 723 in conjunction with SAS metal ceiling systems.

BS EN 13501: A2-s1, d0

ASTM E84/UL 723: Class A

Please contact us for further information on system specific fire performance data.



VOCs

WoodTones sublimated finishes have been tested in accordance with Indoor Air Comfort Gold 6.0 and emit very low levels of VOCs (<math><5\mu\text{g}/\text{m}^3</math>); they are classified E1 for release of Formaldehyde in accordance with BS EN 13964:2014 (annex E).

WARRANTY PERIODS

INTERNAL


25
years

EXTERNAL

On request
project specific



THE LIFE EXPECTANCY OF THE PRODUCT IS MORE THAN 35 YEARS

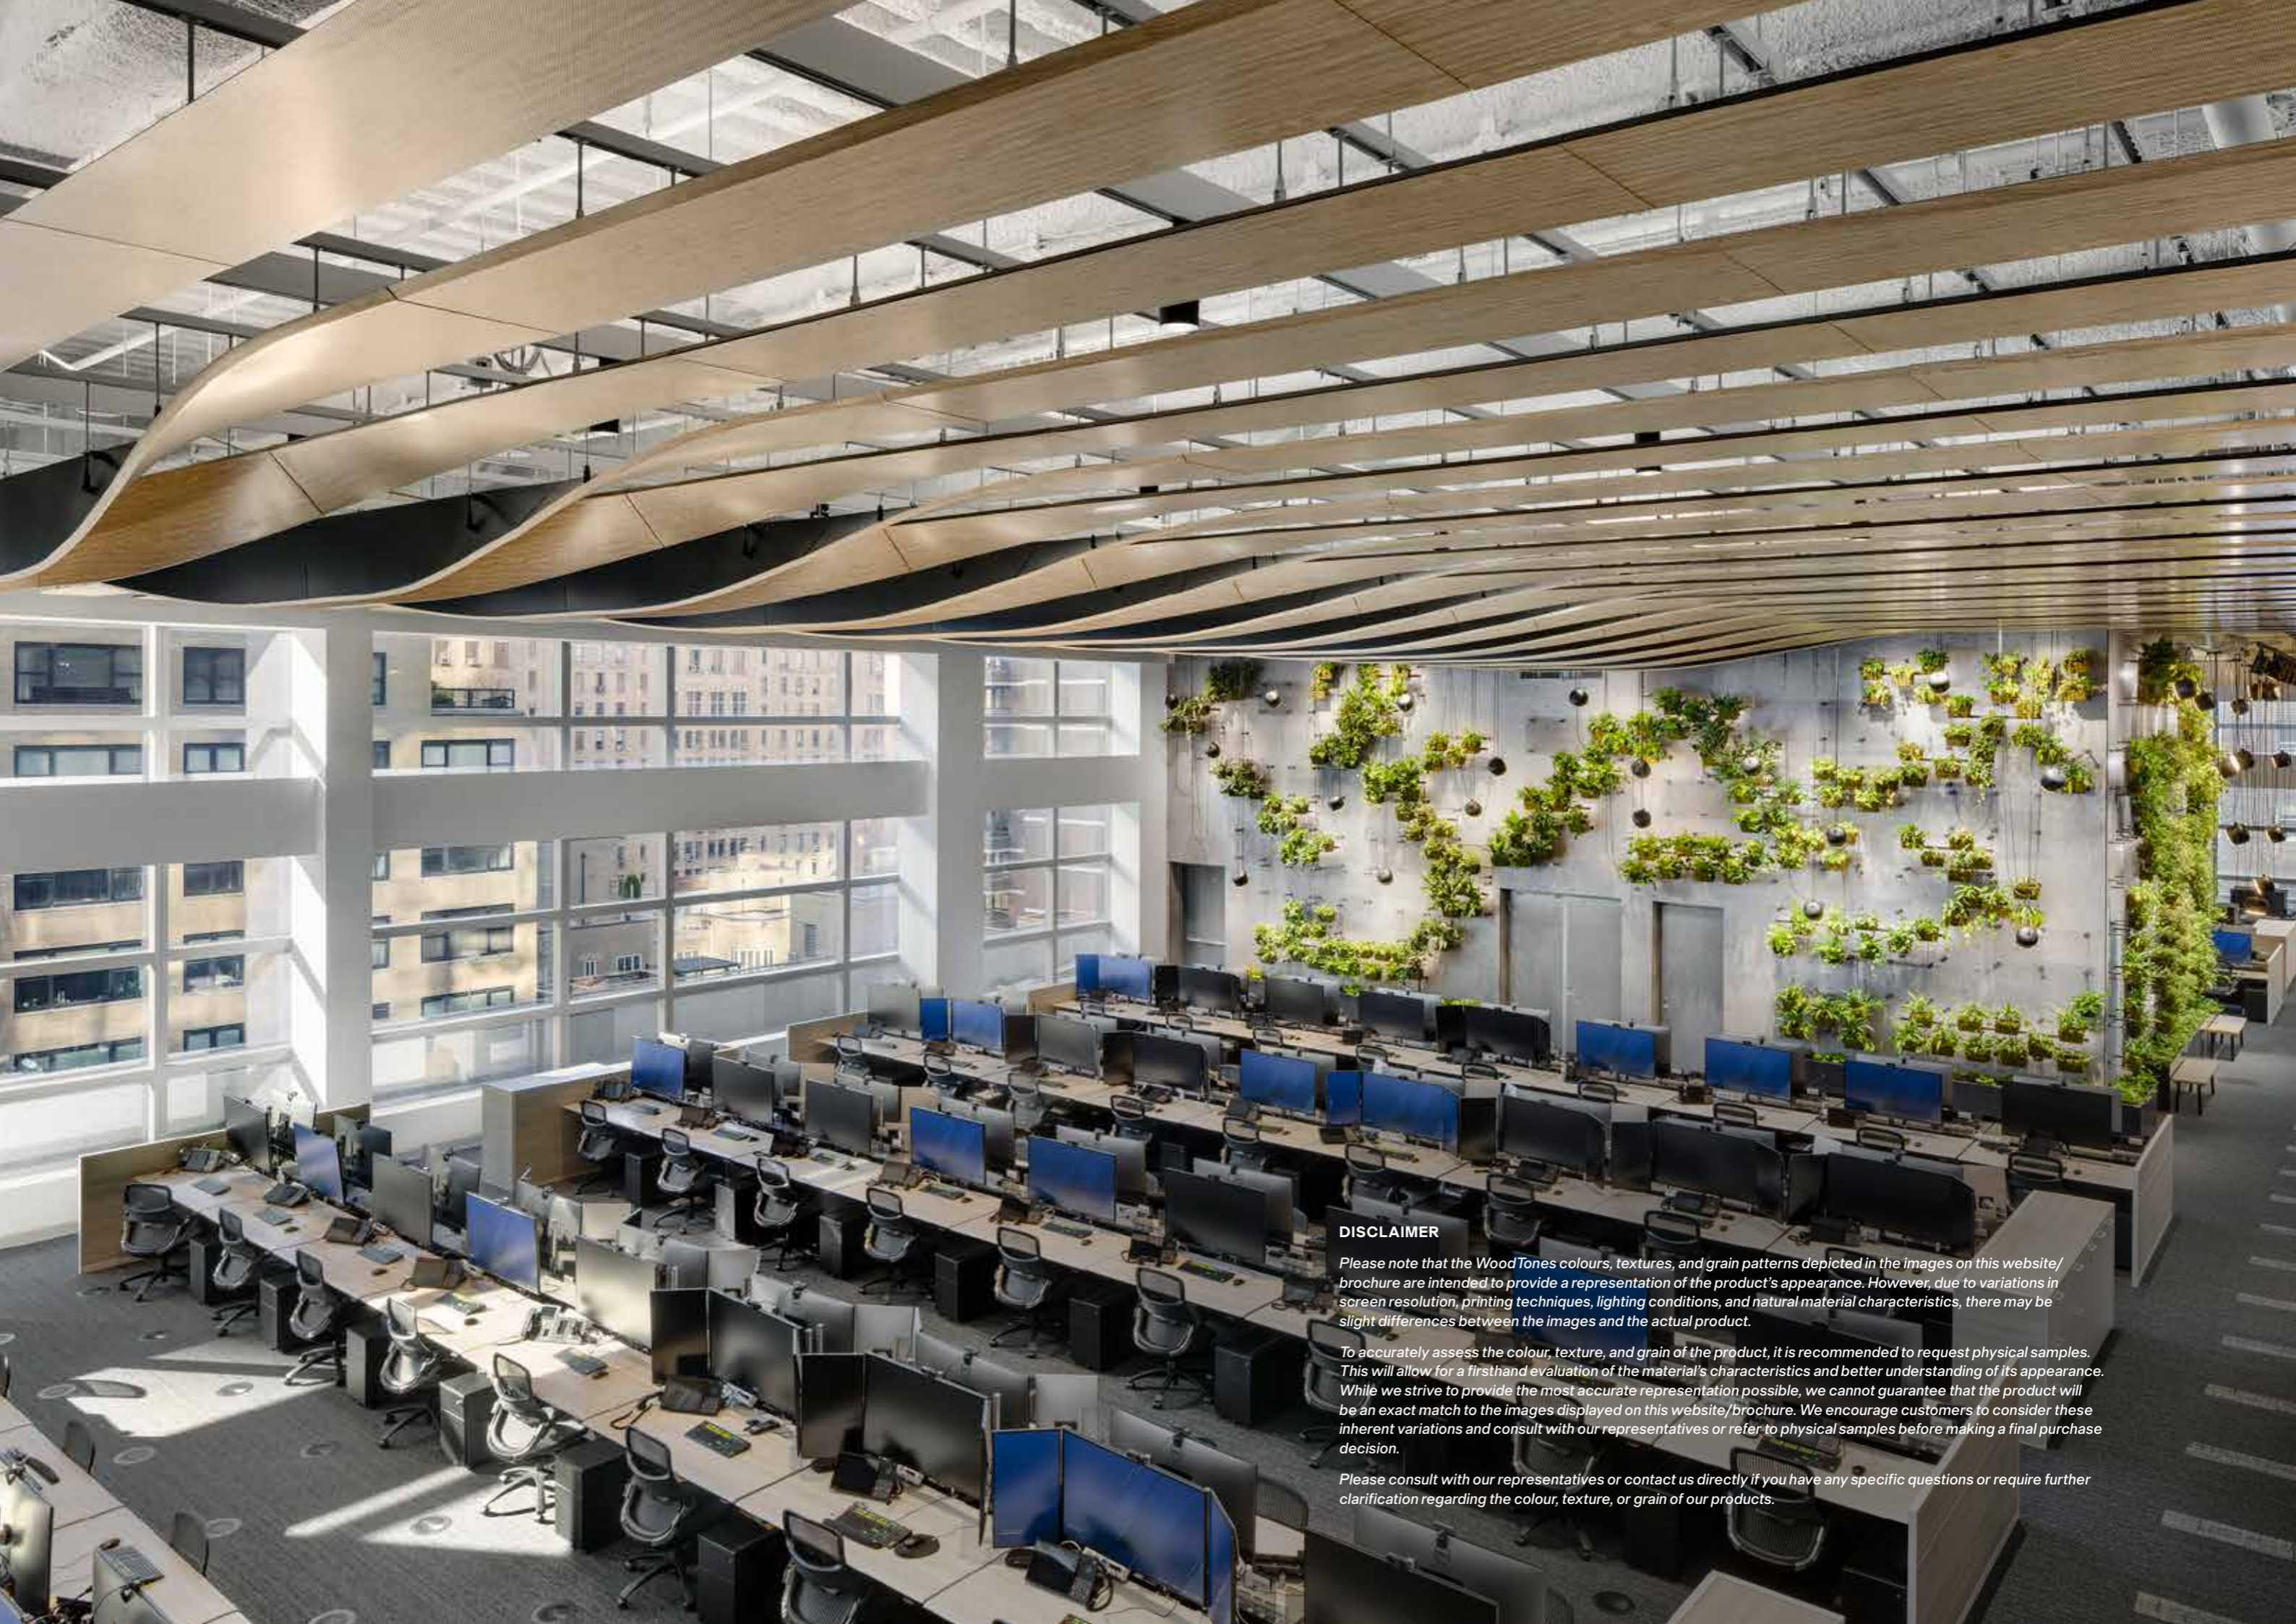

DISCLAIMER

Please note that the WoodTones colours, textures, and grain patterns depicted in the images on this website/brochure are intended to provide a representation of the product's appearance. However, due to variations in screen resolution, printing techniques, lighting conditions, and natural material characteristics, there may be slight differences between the images and the actual product.

To accurately assess the colour, texture, and grain of the product, it is recommended to request physical samples. This will allow for a firsthand evaluation of the material's characteristics and better understanding of its appearance. While we strive to provide the most accurate representation possible, we cannot guarantee that the product will be an exact match to the images displayed on this website/brochure. We encourage customers to consider these inherent variations and consult with our representatives or refer to physical samples before making a final purchase decision.

Please consult with our representatives or contact us directly if you have any specific questions or require further clarification regarding the colour, texture, or grain of our products.

info.sasintgroup.com/woodtones



HEAD OFFICE (UK)
EMAC House, Unit 28
Suttons Business Park

Sutton Park Avenue
Earley, Reading
RG6 1AZ

+44 (0)118 929 09 00
enquiries@sasintgroup.com
sasintgroup.com