

## Statement of Verification

BREG EN EPD No.: 220

Issue 1

This is to verify that the  
**Environmental Product Declaration**  
provided by:  
**SAS International**



is in accordance with the requirements of:  
**EN 15804:2012+A1:2013**

and  
**BRE Global Scheme Document SD207**

This declaration is for:  
**SAS System 510 Metal Ceiling Waveform Baffle with Acoustic Inserts**

### Company Address

Parc Crescent  
Waterton Industrial Estate  
Bridgend  
CF31 3XU



Signed for BRE Global Ltd

Laura Critien  
Operator

13 November 2018  
Date of this Issue

13 November 2018  
Date of First Issue

10 November 2023  
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit [www.greenbooklive.com/terms](http://www.greenbooklive.com/terms)).

To check the validity of this statement of verification please, visit [www.greenbooklive.com/check](http://www.greenbooklive.com/check) or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.  
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: [Enquiries@breglobal.com](mailto:Enquiries@breglobal.com)

## Environmental Product Declaration

EPD Number: 220

### General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013
Commissioner of LCA study	LCA consultant/Tool
SAS International 31 Sutton Business Park Reading UK RG6 1AZ	BRE LINA Version 2.0.8
Declared/Functional Unit	Applicability/Coverage
1m <sup>2</sup> of SAS System 510 metal ceiling waveform baffle with acoustic inserts	Manufacturer specific product averages.
EPD Type	Background database
Cradle to Gate with options	ecoinvent v3.2
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR <sup>a</sup>	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input type="checkbox"/> External	
(Where appropriate <sup>b</sup> )Third party verifier: <a href="#">Click here to enter text.</a>	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A1:2013. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A1:2013 for further guidance	

### Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
					Related to the building fabric				Related to the building							
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

### Manufacturing site(s)

SAS International Waterton Industrial Estate Bridgend South Wales UK	
--	--

### Construction Product:

#### Product Description

System 510 consist of powder coated steel waveform baffle with acoustic insert, made from various combinations and thicknesses of acoustic facings, insulation layers bonded together with adhesive. Standard baffle lengths are 1200mm, 1500mm, 1800mm and 3000mm. Baffle depths are between 150 mm and 1000mm, however bespoke size are available on request. System 510 acoustic waveform baffles offer a visually engaging alternative to suspended acoustic ceiling systems, ideal for exposed soffit areas.

System 510 can be plain or perforated to meet acoustic and client requirements. Baffles offer exceptional absorption characteristics, effectively controlling reverberation within these highly sound reflective interiors. The radii of the baffles can form individual elements or continual rhythmic lines stretching across a ceiling plane.

#### Technical Information

##### Property

System components are manufactured and tested in accordance with BS EN 13964:2014.

**Essential Characteristics** Performance:

Reaction to Fire: (up to) A2-S1-D0 European Reaction to Fire classification system (Euroclasses)

Release of Formaldehyde: CLASS E1

Release of Asbestos: NO CONTENT

Sound Absorption: (up to) Single Value  $\alpha_w = 1.00$  class A

Durability: CLASS B

### Main Product Contents

The raw material quantities have been taken for all variations of the system and modelled as a single dataset. The main product contents listed below represent the average values derived from this dataset, with a weight of 7.93Kg/ m<sup>2</sup>


Material/Chemical Input	%
Steel	73%
Polyester Powder Coating	2.5%
Acoustic insulation core	23%
Tissue facing	1.3%
Adhesive	0.2%

### Manufacturing Process

The Bridgend factory is split into two separate units; Unit 1 is where the tile systems are formed, including the addition of the various types of acoustic padding. Key Unit 1 processes include: slitting of the steel/aluminium coils, perforating, washing, spray coating and drying. These processes account for the most energy intensive stages of the products life cycle. Unit 2 is where the grid systems are rolled and formed; it houses less energy-intensive processes than Unit 1.

Process flow diagram

SAS Ceiling Steel Tile Manufacturing Process

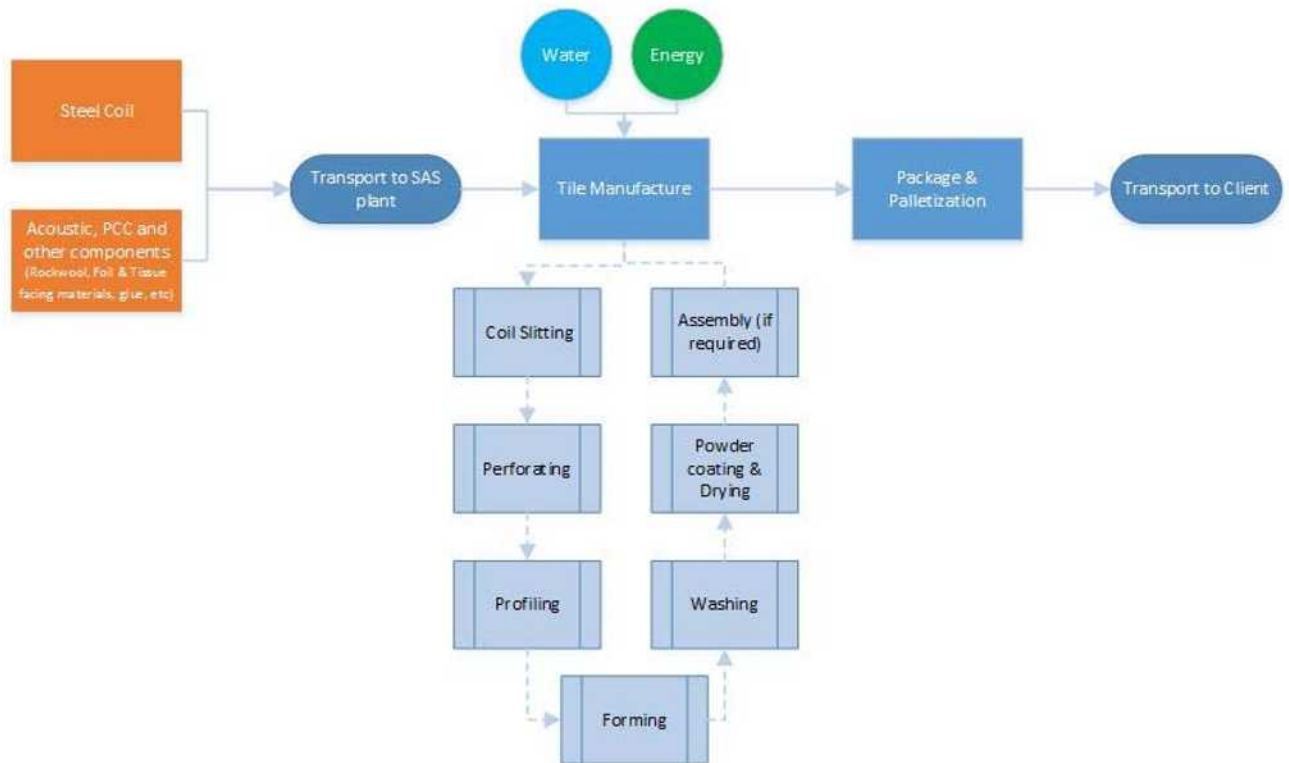

Life Cycle Assessment Calculation Rules

Declared / Functional unit description

1m2 of SAS 510 System (7.93Kg/ m<sup>2</sup>) - Polyester powder coated steel waveform baffle with acoustic infills for use in ceiling applications. The product represented in this EPD is based on manufacturing data for all types of steel SAS 510 baffles with acoustic inserts systems made.

System boundary

This is a cradle-to-gate with options LCA, reporting all production life cycle stages of modules A1 to A3, and end of life disposal module C4 in accordance with EN15804:2012+A1:2013.

Data sources, quality and allocation

The supporting LCA study was carried out using BRE LINA v2.0.8 using manufacturer specific data provided by SAS International for the production period of the 12 months of 2017. Raw material quantities have been taken from recorded production/manufacture data and product geometry from the Syteline internal production system, for all variations of the system 510 steel baffle and acoustic inserts made in the 12 month period.

SAS International manufacture other products in addition to the System 510 so some allocation of primary data has been carried out. Since the manufacturing steps responsible for slitting, perforating and drying the coated metal are the most energy intensive processes of the site, it is assumed that the gas and electricity consumption is the same for every m<sup>2</sup> of metal product produced. This same allocation was applied to total site water usage. Production waste has been allocated to individual products by applying a percentage wastage rate (based on historical values and used for stock management) to each quantity of raw material. All packaging and non-production waste (waste packaging) has also been allocated using this methodology with applied percentage based on planned/estimated packaging and waste requirements for each product/system/components.

Secondary data has been drawn from the BRE LINA database v2.0.29 and the background LCI datasets are based on ecoinvent v3.2. Upstream extraction and/or processing of inputs are included within the use of the background datasets within LINA. Emissions from fuels used are included within the relevant datasets.

### Cut-off criteria

No inputs or outputs have been excluded and all raw materials, packaging and transport, energy, water use and wastes, are included, except for direct emissions to air, water and soil, which are not measured.

## LCA Results

Results per declared unit 1m<sup>2</sup> (7.93kg/m<sup>2</sup>) of this SAS System 510 with acoustic inserts, for the declared modules can be found in the following.

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP	ODP	AP	EP	POCP	ADPE	ADPF
			kg CO <sub>2</sub> equiv.	kg CFC 11 equiv.	kg SO <sub>2</sub> equiv.	kg (PO <sub>4</sub> ) <sup>3-</sup> equiv.	kg C <sub>2</sub> H <sub>4</sub> equiv.	kg Sb equiv.	MJ, net calorific value.
Product stage	Raw material supply	A1	1.65e+1	1.26e-6	1.83e-1	6.40e-2	1.83e-2	1.94e-3	2.31e+2
	Transport	A2	1.20e-1	2.28e-8	4.12e-4	1.09e-4	8.33e-5	2.22e-7	1.87
	Manufacturing	A3	5.51	5.43e-7	2.97e-2	7.31e-3	2.19e-3	9.03e-6	1.03e+2
	Total (of product stage)	A1-3	2.22e+1	1.82e-6	2.13e-1	7.14e-2	2.05e-2	1.95e-3	3.36e+2
	Disposal	C4	1.03e-4	2.73e-11	7.24e-7	2.38e-7	1.20e-7	1.47e-10	2.54e-3

GWP = Global Warming Potential;  
 ODP = Ozone Depletion Potential;  
 AP = Acidification Potential for Soil and Water;  
 EP = Eutrophication Potential;

POCP = Formation potential of tropospheric Ozone;  
 ADPE = Abiotic Depletion Potential – Elements;  
 ADPF = Abiotic Depletion Potential – Fossil Fuels;

## LCA Results (continued)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	2.17e+1	2.66e-4	2.17e+1	2.47e+2	0	2.47e+2
	Transport	A2	2.79e-2	7.44e-8	2.79e-2	1.86	0	1.86
	Manufacturing	A3	1.94e+1	1.48e-5	1.94e+1	1.26e+2	0	1.26e+2
	Total (of product stage)	A1-3	4.11e+1	2.81e-4	4.11e+1	3.76e+2	0	3.76e+2
	Disposal	C4	7.76e-5	2.12e-10	7.76e-5	2.56e-3	0	2.56e-3

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource

### LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	0	0	0	4.09e-1
	Transport	A2	0	0	0	4.32e-4
	Manufacturing	A3	0	0	0	3.12e-2
	Total (of product stage)	A1-3	0	0	0	4.41e-1
	Disposal	C4	0	0	0	2.86e-6

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water

### LCA Results (continued)

Other environmental information describing waste categories						
			HWD	NHWD	RWD	
			kg	kg	kg	
Product stage	Raw material supply	A1	3.16	1.42	5.73e-4	
	Transport	A2	7.19e-4	1.50e-1	1.29e-5	
	Manufacturing	A3	2.07e-2	1.75e-1	5.90e-4	
	Total (of product stage)	A1-3	3.18	1.74	1.18e-3	
	Disposal	C4	1.91e-6	1.00e-2	1.57e-8	

HWD = Hazardous waste disposed;  
NHWD = Non-hazardous waste disposed;  
RWD = Radioactive waste disposed



## LCA Results (continued)

Other environmental information describing output flows – at end of life				CRU	MFR	MER	EE
				kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	0	0	0	0	
	Transport	A2	0	0	0	0	
	Manufacturing	A3	0	5.10e-1	0	0	
	Total (of product stage)	A1-3	0	5.10e-1	0	0	
	Disposal	C4	0	7.93	0	0	

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy

## Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
C4 disposal at end of life	It is assumed that as the main element of the 510 system is steel and a valuable material, 100% of the product is recycled at end of life. Acoustic inserts can be disassembled back to core components/layers and then recycled. Aluminium foil facing as valuable material and is 100% recyclable via general recycling streams. 100% of the mineral wool insulation core can be recycled via to manufacturer. It is assumed that the adhesive bond will mainly remain on the face of the acoustic insulation when the layers are separated and will be disposed of as part of the insulation recycling process. Tissue facing material is 100% recyclable, however significant volume is required to make it commercially viable. Therefore it is assumed that it would be sent to landfill at the end of life		

## References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.

BSI. Suspended Ceilings - Requirements and tests methods. BS EN 13964:2014. London, BSI, 2014.